




Reyfama
Venta y Alquiler para la Construcción
Calle Ca'n Valero, 33 - Polígono Ca'n Valero - Palma de Mallorca

971 76 47 50
625 12 88 74
www.reyfama.es

solutions holding your ideas.

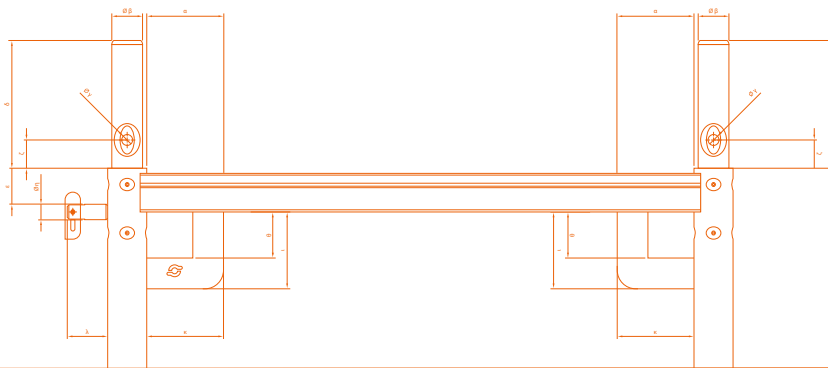

FA-48[®]

Catalogue & Assembly solutions

Frame scaffold system

www.reyfama.es



971 76 47 50



625 12 88 74





www.reyfama.es



971 76 47 50



625 12 88 74



A hand wearing a black nitrile glove is shown holding a silver, cylindrical metal pole. The pole has a horizontal bracket or handle attached to it. The background is a solid, vibrant orange color. The text 'FOR ALL TYPES OF FAÇADE WORKS' is printed in white, bold, sans-serif capital letters, with a thin white horizontal line underneath.

**FOR ALL TYPES
OF FAÇADE WORKS**

Reyfama

Venta y Alquiler para la Construcción

📍 Calle Ca'n Valero, 33 - Polígono Ca'n Valero - Palma de Mallorca

☎ 971 76 47 50

📞 625 12 88 74

www.reyfama.es



INDEX

06| CATARI FA-48® OVERVIEW

Key features
Assembly flow
Certification
Benefits

17| FRAMES

19| SIDE PROTECTION

Guardrails
Advance guardrails

22| DIAGONAL BRACES

23| TOE BOARDS

24| DECKS

26| ACCESSES

Access decks
Staircases

29| TEMPORARY PROTECTION FOR SCAFFOLDERS

30| BRACKETS

32| ACCESSORIES FOR CORNERS

Adjustable toe board and guardrail
Decks for circular lineups
Decks for straight corners

34| ASSEMBLY FRAMES

Sidewalks protection
Slopes or uneven floors
Protruding façades

37| LATTICE BEAMS

38| SCAFFOLD TIES

40| FA-48® COUPLERS

41| MOBILE SCAFFOLDING

42| COMPATIBILITY WITH CATARI US®

43| MODULAR PALLET

catari



TECHNICAL FEATURES

System type	Frame
Tube diameter ⁽¹⁾	48,3 mm
Tube thickness ⁽¹⁾	2,9 mm
Steel grade ⁽¹⁾	S235 JR
Coating ⁽¹⁾	Hot-dipped galvanized
Load capacity of the steel decks	4,5 kN/m ² (3,07 m and 2,57 m) ⁽²⁾ 6,0 kN/m ² (< 2,57 m) ⁽³⁾
Applications	Façade ■ Stair tower ■ Rebar ■ Working platform
Maximum height	100 m ⁽⁴⁾
Bay widths	0,73 m
Bay lengths	0,73 ■ 1,07 ■ 1,57 ■ 2,07 ■ 2,57 ■ 3,07 m
Access types	Deck with trapdoor ■ Staircase
Accessories	Mobile scaffold ■ Circular line-up ■ Pedestrian protection ■ Protruding façades ■ Complementary protection
Average weight when assembled	14 kg/m ²
Average assembly rates	16,5 m ² /man-hour ■ 13 m ³ / man-hour ■ 225 kg/ man-hour ⁽⁵⁾
Average cargo per truck/ 40 ft container	1200/1000 m²
Certification	class 3 according to EN 12810-1, ANEOR

⁽¹⁾ Frame FA-48®

⁽²⁾ class 5 according to EN 12810-1

⁽³⁾ class 6 according to EN 12810-1

⁽⁴⁾ depending on the scaffold configuration, wind action, live loads and local conditions

⁽⁵⁾ considering an experienced team of 3 scaffolders

CATARI FA-48® OVERVIEW

The frame is the key component of the system and allows a working area with a width of 64 cm and an height of 2 m. The remaining components are available in incremental sizes to provide the system an increased flexibility.

The fitting mechanisms of the guardrails and diagonal braces were conceived to grant a self-explanatory and efficient assembly workflow, without hammer or other special tools.

The available accessories enhance the adaptation of the scaffold to the most irregular façades and even set up other configurations.

Safety comes easy

The gravity pins ensure the guardrails and diagonal braces are fastened with a single push, while the built-in spigots grant a straightforward connection between frames and their correct setting in the upright.

Once stacked, the upper frames automatically prevent the decks against accidental lifting or tilting.

High assembly rate

The reduced number of components per m² when compared to the multidirectional systems, and the lightweight guardrails favour the performance of scaffolders and improve the assembly rates.

Durability

Manufactured with structural steel, automatic welding and coated with an hot-dipped galvanization, the system grants the user the best quality and durability, with the least possible maintenance.

Catari US® compatible

As the decks and the staircases of Catari FA-48® fit on Catari US® U-ledgers, it is possible to use these components on both systems, thus reducing the investment.

Due to the matching grid-size of Catari FA-48® and Catari US®, it is possible to combine both systems for an easier assembly in complex structures.

www.reyfama.es

📞 971 76 47 50

📞 625 12 88 74

📱

HOW DOES IT WORK?

To increase the length of the scaffold, add new frames and connect them with guardrails; to increase the height, stack additional frames on the top of the existing ones. Diagonal braces and decks will grant the rigidity of the scaffold, waiving the use of ledgers.

Frame

The built-in spigots on the top of the frames ensure their quick fit and correct setting in the upright. Three single-push fittings are available and allow the assembly of two guardrails on the backside and one on the side of the façade.

Decks

Fit on the U profile of the frames and work as structural elements for the stability of the assembly. The lower bar of the frame above prevents them from accidental lifting.

The access decks are used to ensure a safe passage between levels. The integrated ladders are retractable to also permit working on these bays.

Guardrails

Used as side protection, they are locked with a single-push onto the slide-in fittings of the frames.

Diagonal braces

Fit on the gravity pins located on the external side of the frames and start ledgers, uniting them and ensuring the scaffold bracing.

Toe boards

Fixed to the frames by sliding the sockets on their extremities. Along with the guardrails, toe boards work as protective elements along the working corridor.





EN 12810-1

CERTIFICACION

CATARI FA-48® EN 12810-1

AENOR cold stamping on the components attest the conformity of Catari FA-48® system with the European norms **EN 12810** and **EN 12811**.

The fulfilment of these norms grants the user the compliance of the components with the function for which they were developed, with high level of accuracy, safety and durability, as a result of a manufacturing process monitored by an approved and certified internal quality management system.

As a result of being certified, the scaffold Catari FA-48® can even be assembled for a general usage⁽¹⁾ up to an height of 24 m without static calculation. With project-specific planning, other combination of loads and heights are also possible, taking full advantage of Catari's steel decks load-bearing capacity.

⁽¹⁾Inspection, cleaning, maintenance, painting, plastering and restoration works up to 200 kg/m² (class 3).

www.reyfama.es

📞 971 76 47 50

📞 625 12 88 74



WHICH ARE THE BENEFITS?

HIGH ASSEMBLY RATE
for a reduction of the labour costs

ACCESSORIES
for all types of façade

COMPATIBILITY
with the Catari US® scaffold system

CERTIFIED
for 24 m height scaffolds without assembly project

100 m
of maximum height, with project-specific planning



MULTI-STOREY BUILDINGS

An assembly rate up to 16,5 m²/man-hour

Up to 100 m height

The same scaffold for rebar, formwork and
façade works

Special frames to create a safe passage
for the pedestrians

Adjustable guardrail and toe board for
straight corners

Advanced guardrails for an increased safety
of the scaffolders

www.reyfama.es

📞 971 76 47 50

📞 625 12 88 74





TANKS

Angular decks for a continuous working corridor in circular line-ups

Flame retardant aluminium access decks and steel toe boards

Working decks with a load-bearing capacity up to 600 kg/m²

www.reyfama.es

📞 971 76 47 50

📠 625 12 88 74

🌐 📷

A full-page background image showing a construction worker on a multi-level Catari scaffolding. The worker is on the top level, using a long-handled brush to paint the underside of a corrugated metal roof. The scaffolding has orange horizontal beams and silver metal frames. The building being worked on has light-colored vertical siding. The scene is outdoors with some greenery visible on the left.

CEILING

Working loads up to 75 kg/m²

Aluminium lattice beams for an easier handling

Compatible with Catari US® bridging ledgers for a more effective assembly



SEQUENTIAL WORKS

Work in sections up to an height of 6 m, reusing the same base components

Possibility of working façades or ceilings

www.reyfama.es

📞 971 76 47 50

📞 625 12 88 74

📱



STAIR TOWERS

Aluminium staircases for an easy handling on site

Integrated landing to allow the movement between staircases without the assembly of additional decks

Handrails and guardrails for the protection of the stairwell on the last floor

www.reyfama.es

📞 971 76 47 50

📠 625 12 88 74





www.reyfama.es

📞 971 76 47 50

📞 625 12 88 74

📱

WHAT'S NEW?



EN 12810-1

Certification badge

This badge marks EN12810-1 certified products.



To be used with

This badge notifies the components that work in combination to achieve their full potential or safety.



Assembly tips

This badge will guide the user exploring the different possibilities of the system.

Innovative solutions for **corners**

Speed up the assembly on corners replacing the tube and couplers by adjustable components.

Extended working areas

Easily reach over wider balconies by enlarging the scaffold up to 1 m.

Anchorage for **delicate façades**

Reverse tying solutions when it isn't possible to fix the scaffold to a regular concrete wall.



FRAMES

Made of steel, they contain built-in spigots, a support for toe boards and slide-in fittings for guardrails and diagonal braces. The upper U profile bears two steel-decks while the lower profile locks the ones below in position.



< 73 cm >

Ref.	Height (cm)	Width (cm)	Fittings	Weight (kg)
FA.MD.730.2000	200	73	3	18,90
FA.MD4F0730X2000			4	19,00
AA.PS.48 ☼	-			0,08

⊗ Locking pin 8 mm




START LEDGER

Enables the assembly of steel decks on the ground level and the fixation of a diagonal brace on the initial frame.



Ref.	Width (cm)	Weight (kg)
FA.SI.730	73	3,00

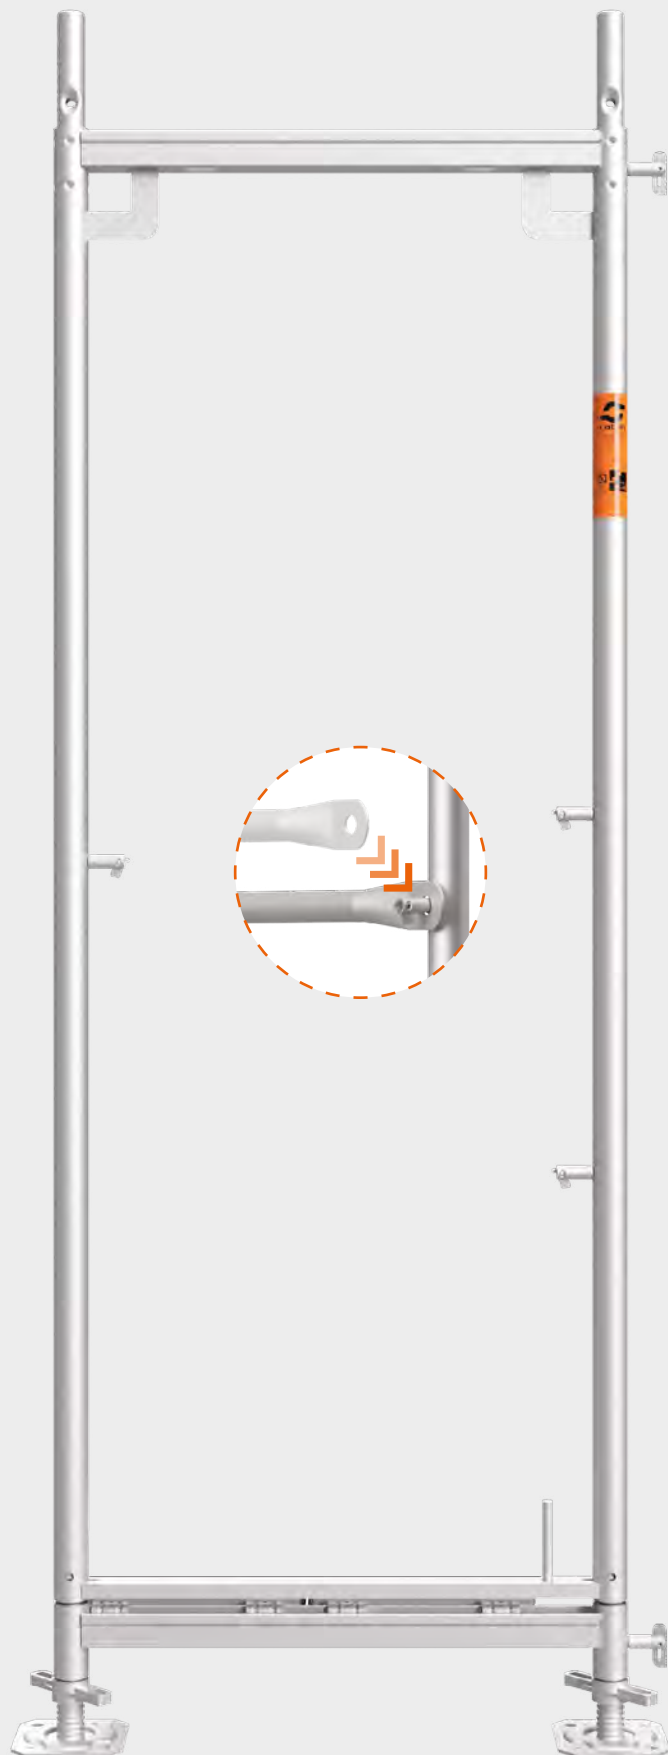



TOP END FRAME

Replaces the frames on the extremities of the last level. Provided with slide-in fittings for fixing guardrails and a socket for toe boards.




Ref.	Height (cm)	Width (cm)	Weight (kg)
FA.PT.0730	100	73	10,70



TOP INTERMEDIATE FRAMES

Replace the frames on the intermediate spans of the last level. Provided with slide-in fittings for fixing guardrails and a socket for toe boards.

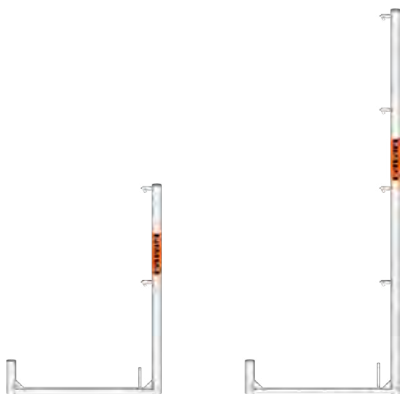

Ref.	Height (cm)	Width (cm)	Weight (kg)
FA.PP.730.1000	100	73	5,40
FA.PP.730.2000	200		8,40



AA.AE
Spacing Coupler
Page 41



EN 12810-1

GUARDRAILS

Used to protect the rear or front perimeters, they are locked in position with a single push. Grant an increased transport and storage efficiency when compared to the advance guardrails.



Ref.	Length (cm)	Weight (kg)
FA.TR.730	73	1,20
FA.TR.1070	107	1,80
FA.TR.1570	157	2,60
FA.TR.2070	207	3,40
FA.TR.2570	257	4,20
FA.TR.3070	307	5,00



EN 12810-1

DOUBLE GUARDRAILS FOR END SIDE

Used to protect the extremities of the scaffold, including in cantilevered spans.



Ref.	Width (cm)	Weight (kg)
FA.GT0360	36	1,70
FA.GT.730	73	2,90
FA.GT1000	100	3,50



www.reyfama.es

971 76 47 50


625 12 88 74



ADVANCE GUARDRAILS


With the advantage of being assembled from the lower level, these guardrails serve also as additional protection against falls during the assembly. Once placed, their function is the same of the standard guardrails.

FRONT

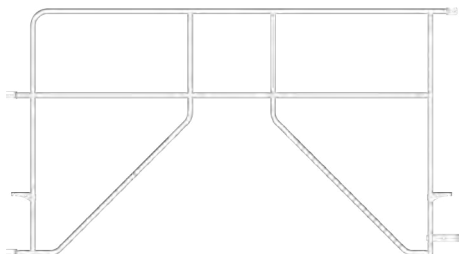

Ref.	Length (cm)	Weight (kg)
FA.GCSD073	73	8,70
FA.GCSD107	107	10,40
FA.GCSD157	157	13,60
FA.GCSD207	207	17,40
FA.GCSD257	257	20,00
FA.GCSD307	307	21,70

END SIDE



Ref.	Width (cm)	Weight (kg)
FA.GCSDT073	73	8,20






www.reyfama.es

📞 971 76 47 50

📞 625 12 88 74


🌐 📷

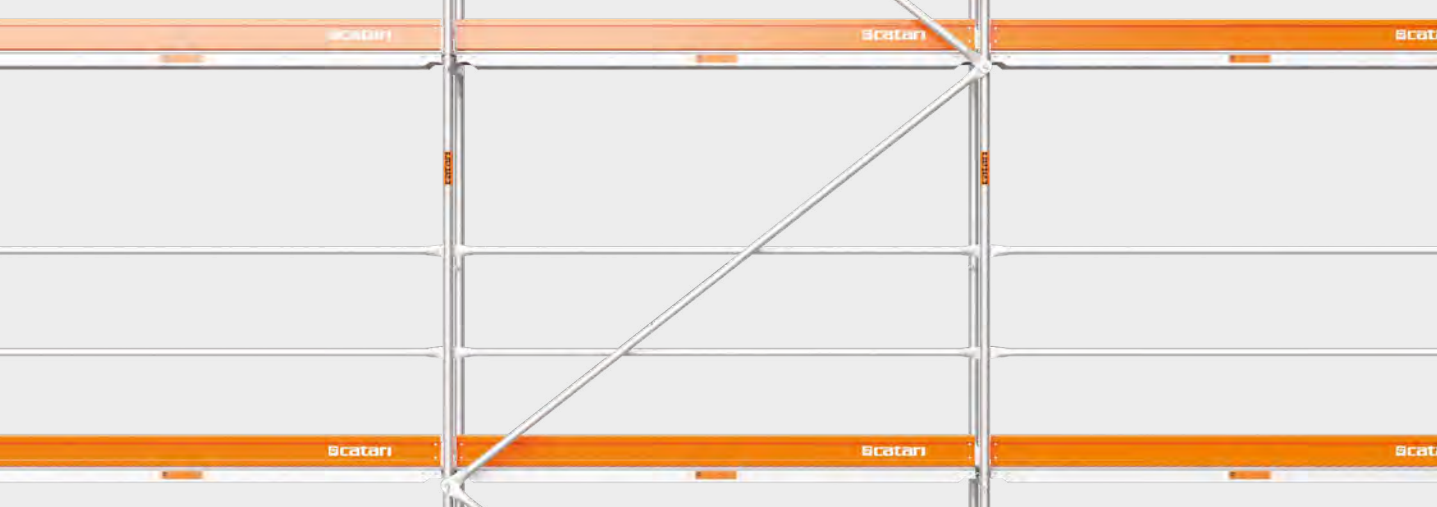

EN 12810-1

DIAGONAL BRACES

Used to brace the scaffold on a parallel direction to the façade.

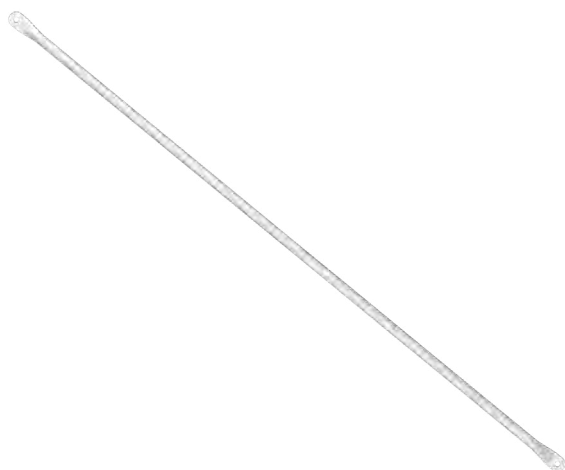

Ref.	Height (cm)	Length (cm)	Weight (kg)
FA.DG.1570	200	157	4,60
FA.DG.2070		207	5,20
FA.DG.2570		257	5,90
FA.DG.3070		307	6,60





STEEL TOE BOARDS

Made of pre-galvanized steel, painted afterwards, and provided with sockets on the extremities for a simple assembly, they prevent objects from falling outside the working area.

FRONT



Ref.	Length (cm)	Weight (kg)
FA.RFM.0730	73	2,00
FA.RFM.1070	107	2,90
FA.RFM.1570	157	4,10
FA.RFM.2070	207	5,30
FA.RFM.2570	257	6,60
FA.RFM.3070	307	7,90



END SIDE



Ref.	Width (cm)	Weight (kg)
FA.RTM0360	36	0,86
FA.RTM.730	73	1,80
FA.RTM1000	100	2,50






3

NEW
STEEL DECKS
Light, Lasting, Limitless



L³ STEEL DECKS

The lightest certified steel deck of the market. Entirely galvanised, this one piece platform is available in a range of two engineered profiles for an optimal weight and load capacity of up to 600 kg/m².

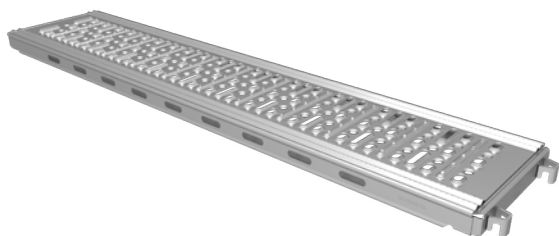


Ref.	Length (cm)	Width (cm)	Height (cm)	Class	Weight (kg)
FA.PLC32X6X073	73	32	6	6	4,90
FA.PLC32X6X107	107				6,80
FA.PLC32X6X140	140				8,60
FA.PLC32X6X157	157				9,60
FA.PLC32X6X207	207				12,30
FA.PLC32X7X257	257	32	7	5	16,00
FA.PLC32X7X307	307				18,90

More dimensions available upon request.

L³ SLIM STEEL DECKS


These slimmer L³ steel decks, with 19 cm width, serve to complement the floor when brackets are used and fill gaps in specific widths.

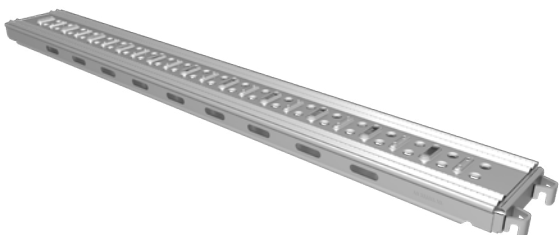





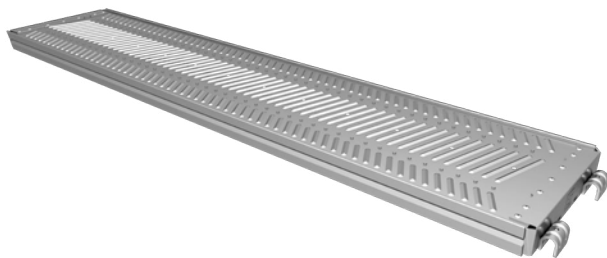

Ref.	Length (cm)	Width (cm)	Height (cm)	Class	Weight (kg)
FA.PLC19X6X073	73	19	6	5	3,60
FA.PLC19X6X107	107				5,10
FA.PLC19X6X140	140				6,50
FA.PLC19X6X157	157				7,20
FA.PLC19X6X207	207				9,40
FA.PLC19X6X257	257	19	6	5	11,60
FA.PLC19X6X307	307				13,80

PLAIN STEEL DECKS

Made of pre-galvanized steel, they offer the possibility of creating an entirely closed working platform.



Ref.	Length (cm)	Width (cm)	Class	Weight (kg)
FA.PL.320.0730 	73	32	3	5,60
FA.PL.320.1070 	107			7,50
FA.PL.320.1570 	157			10,40
FA.PL.320.2070 	207			13,20
FA.PL.320.2570 	257			16,40
FA.PL.320.3070 	307			19,20











EN 12810-1

DOUBLE DECKS

Replace two 32 cm steel decks, reducing the weight and speeding up the assembly and disassembly. The frame is made of aluminium and it is possible to choose between an anti-slip surface of plywood or aluminium.



Ref.	Length (cm)	Width (cm)	Class	Weight (kg)
FA.PDC157 	157	61	3	12,50
FA.PDC207 	207			16,30
FA.PDC257 	257			20,00
FA.PDC307 	307			25,30
FA.PDA157 	157	61	3	11,30
FA.PDA207 	207			14,80
FA.PDA257 	257			18,10
FA.PDA307 	307			23,00

www.reyfama.es

☎ 971 76 47 50

☎ 625 12 88 74





ACCESS DECKS

Made of aluminium and provided with an anti-slip plywood surface, they are used for the movement between levels, through a retractable ladder and a trapdoor.



Ref.	Length (cm)	Width (cm)	Class	Weight (kg)
FA.PATC207 	207	61	3	16,70
FA.PATC257 	257			23,10
FA.PATC307 	307			28,50
AA.EAL200 	aluminium ladder to use with FA.PATC207			3,30

ALUMINIUM ACCESS DECKS

Entirely made of aluminium for an improved durability and provided with a trapdoor with side opening for an enhanced comfort during usage.





Ref.	Length (cm)	Width (cm)	Class	Weight (kg)
FA.PALA207 	207	61	3	18,00
FA.PALA257 	257			24,00
FA.PALA307 	307			28,90
AA.EAL200 	aluminium ladder to be used with FA.PALA207			3,30



STAIRCASES

Used to form access towers or in façade scaffolds for a more ample access. Made of aluminium for a lower weight.



Ref.	Height (cm)	Length (cm)	Width (cm)	Weight (kg)
FA.EP.2570 	200	257		25,80
FA.EP.3070 	200	307	62	30,60
FA.EP.1000.620 	100	-		14,60

HANDRAILS FOR STAIRCASES

Used as side protection, external or internal, in accesses with staircases.



Ref.		Weight (kg)
1 AA.CE.1000	FA.EP.1000.620	5,70
1 AA.CE.2000	FA.EP.2570 & FA.EP.3070	8,40
2 FA.CEEP2570	FA.EP.2570	14,10
2 FA.CEEP3070	FA.EP.3070	15,70



GUARDRAIL FOR EGRESS OF STAIRCASE


Used as side protection of the stairwell at the top level.



Ref.	Length (cm)	Weight (kg)
FA.CP	from 257 to 307	10,40

GUARDRAIL FOR LANDING OF STAIRCASES

Used as side protection for the landing of staircases.



Ref.	Length (cm)	Weight (kg)
AA.CTE	from 48 to 74	7,80



FA.EP.1000.620
Staircase 1 m
Page 27

TEMPORARY GUARDRAILS

Used during the assembly to grant to the scaffolder a safe access to the next level, while frames and guardrails are being placed. The post holds two temporary guardrails that are moved from the level below, closing the perimeter of the level above.

ALUMINIUM POST



Ref.

Weight (kg)

AA.GCMP

4,90

ALUMINIUM TEMPORARY GUARDRAILS



Ref.

Length (cm)

Weight (kg)

AA.TE1400A1570

from 200 to 307

2,10

AA.TE2000A3070

from 140 to 157

3,00



BRACKETS

Enable the extension of the working corridor through different deck combinations. In some cases, they shall be used with deck retainers for brackets.



Ref.	Decks ⁽¹⁾	Width (cm)	Weight (kg)
FA.CL.320	1	36	3,50
FA.CL.730	2	73	6,10
FA.CS1000	3	100	8,90

⁽¹⁾ Number of decks per bracket

BRACKET FOR EAVES

Used to work on roof eaves and façade cornices. Their use replaces the separate assembly of a frame and a bracket.



Ref.	Decks ⁽¹⁾	Height (cm)	Width (cm)	Weight (kg)
FA.MC0730X1000	2	100	115	13,20



FRAMES FOR BRACKETS

Used with brackets. Provided with slide-in fittings for guardrails and a support for toe boards.



Ref.	Height (cm)	Width (cm)	Weight (kg)
FA.PPC0360	100	36	4,60
FA.PPC0730	100	73	5,20
FA.PPC1000	100	100	5,70
AA.PS.FC ☒	-	-	0,09

☒ Locking pin for deck retainer for brackets



EN 12810-1

DECK RETAINERS FOR BRACKETS

Prevent the accidental lifting of decks placed on brackets without frames on the top. ☒ It is blocked with the locking pin **AA.PS.FC**.



Ref.		Weight (kg)
FA.FS.320	FA.CL.320	0,92
FA.FS.730	FA.CL.730	1,60
FA.FS.1000	FA.CL.1000	2,00
AA.PS.FC ☒	-	0,09

☒ Locking pin for deck retainer for brackets

BRACE FOR BRACKETS

Reinforces the load capacity of the 0,73 m and 1,00 m brackets.



Ref.		Weight (kg)
AA.TAC	FA.CL.730 or FA.CL.1000	7,10



FA.RTM
Steel toe boards
Page 23

FA.GT
Double guardrails
for end side
Page 19

www.reyfama.es

971 76 47 50

625 12 88 74






AA.AR Coupler for fixing the toe board

AA.AF Coupler with guardrail socket

Page 40

ADJUSTABLE STEEL TOE BOARD

Toe board with an adjustable length to enclose the working corridor on corners.



Ref.

Length (cm)

Weight (kg)

FA.RE1570A2570

from 157 to 257

8,00

ADJUSTABLE GUARDRAIL

Guardrail with an adjustable length to enclose the working corridor on corners.



Ref.

Length (cm)

Weight (kg)

FA.TE1570A2570

from 157 to 257

4,60

ANGULAR DECK 10/45° 0,73 M

To fill the gap between frames up to an angle of 45°.



Ref.

Width (cm)

Weight (kg)

FA.PLA45.0730 

57

8,00

STEEL PLANKS

To fill the gap between frames up to 2 m.





Ref.

Length (cm)

Width (cm)


Weight (kg)

AA.PSO200X0500	50	20	3,00
AA.PSO200X1000	100		5,60
AA.PSO200X1500	150		8,20
AA.PSO200X2000	200		11,00
AA.PSO200X2500	250		13,60
AA.PSO300X0500	50	30	3,60
AA.PSO300X1000	100		6,50
AA.PSO300X1500	150		9,50
AA.PSO300X2000	200		12,80
AA.PSO300X2500	250		15,70
AA.PARAM10X075D931 	-	-	0,06
AA.PORCM10D315 	-	-	0,01

 Screw M10x75 mm
Wingnut M10

CONNECTION DECK 0,73 M

Allows to fill the gap between frames positioned at 90°.



Ref.

Length (cm)

Width (cm)



Weight (kg)

FA.PL.LC 

57


60

11,10

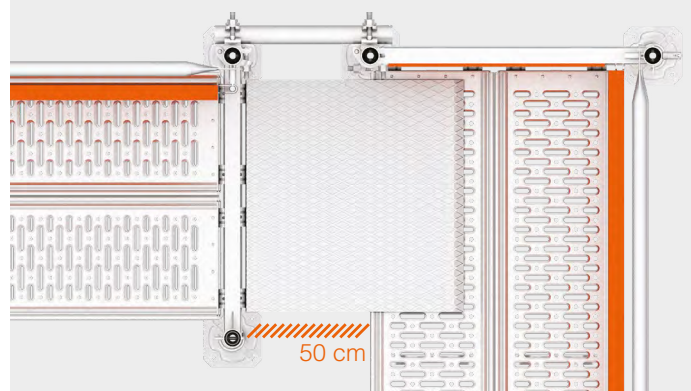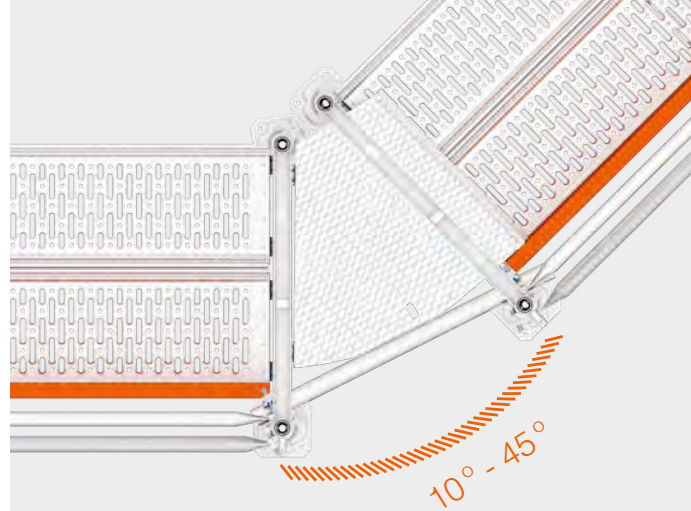

FRAMES FOR SIDEWALKS

To enable a safe passage for pedestrians due to their increased width. Provided with slide-in fittings for guardrails and diagonal braces, and built-in spigots for stacking frames above. ☹ Fix a coupler **FA.AEM** to the frame **FA.MP1250**.

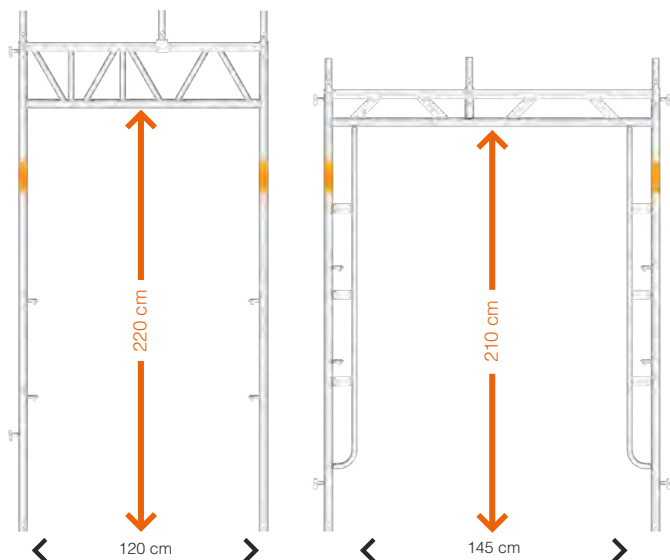

Ref.	Height (cm)	Width (cm)	Weight (kg)
FA.MP1250	255	125	29,80
FA.MP.1500	230	170	35,60
FA.AEM ☹	Spigot coupler for frame		0,80


SUPPORT FOR DEBRIS RETAINER

Bears the corrugated sheets used to contain debris. Provided with fittings compatible with the guardrails. ☹ The sheets are secured by clamps **AA.GFC.48.38**.



Ref.	Protection width (cm)	Width (cm)
AA.GRE	154	12,30
AA.GFC.48.38 ☹	-	0,31



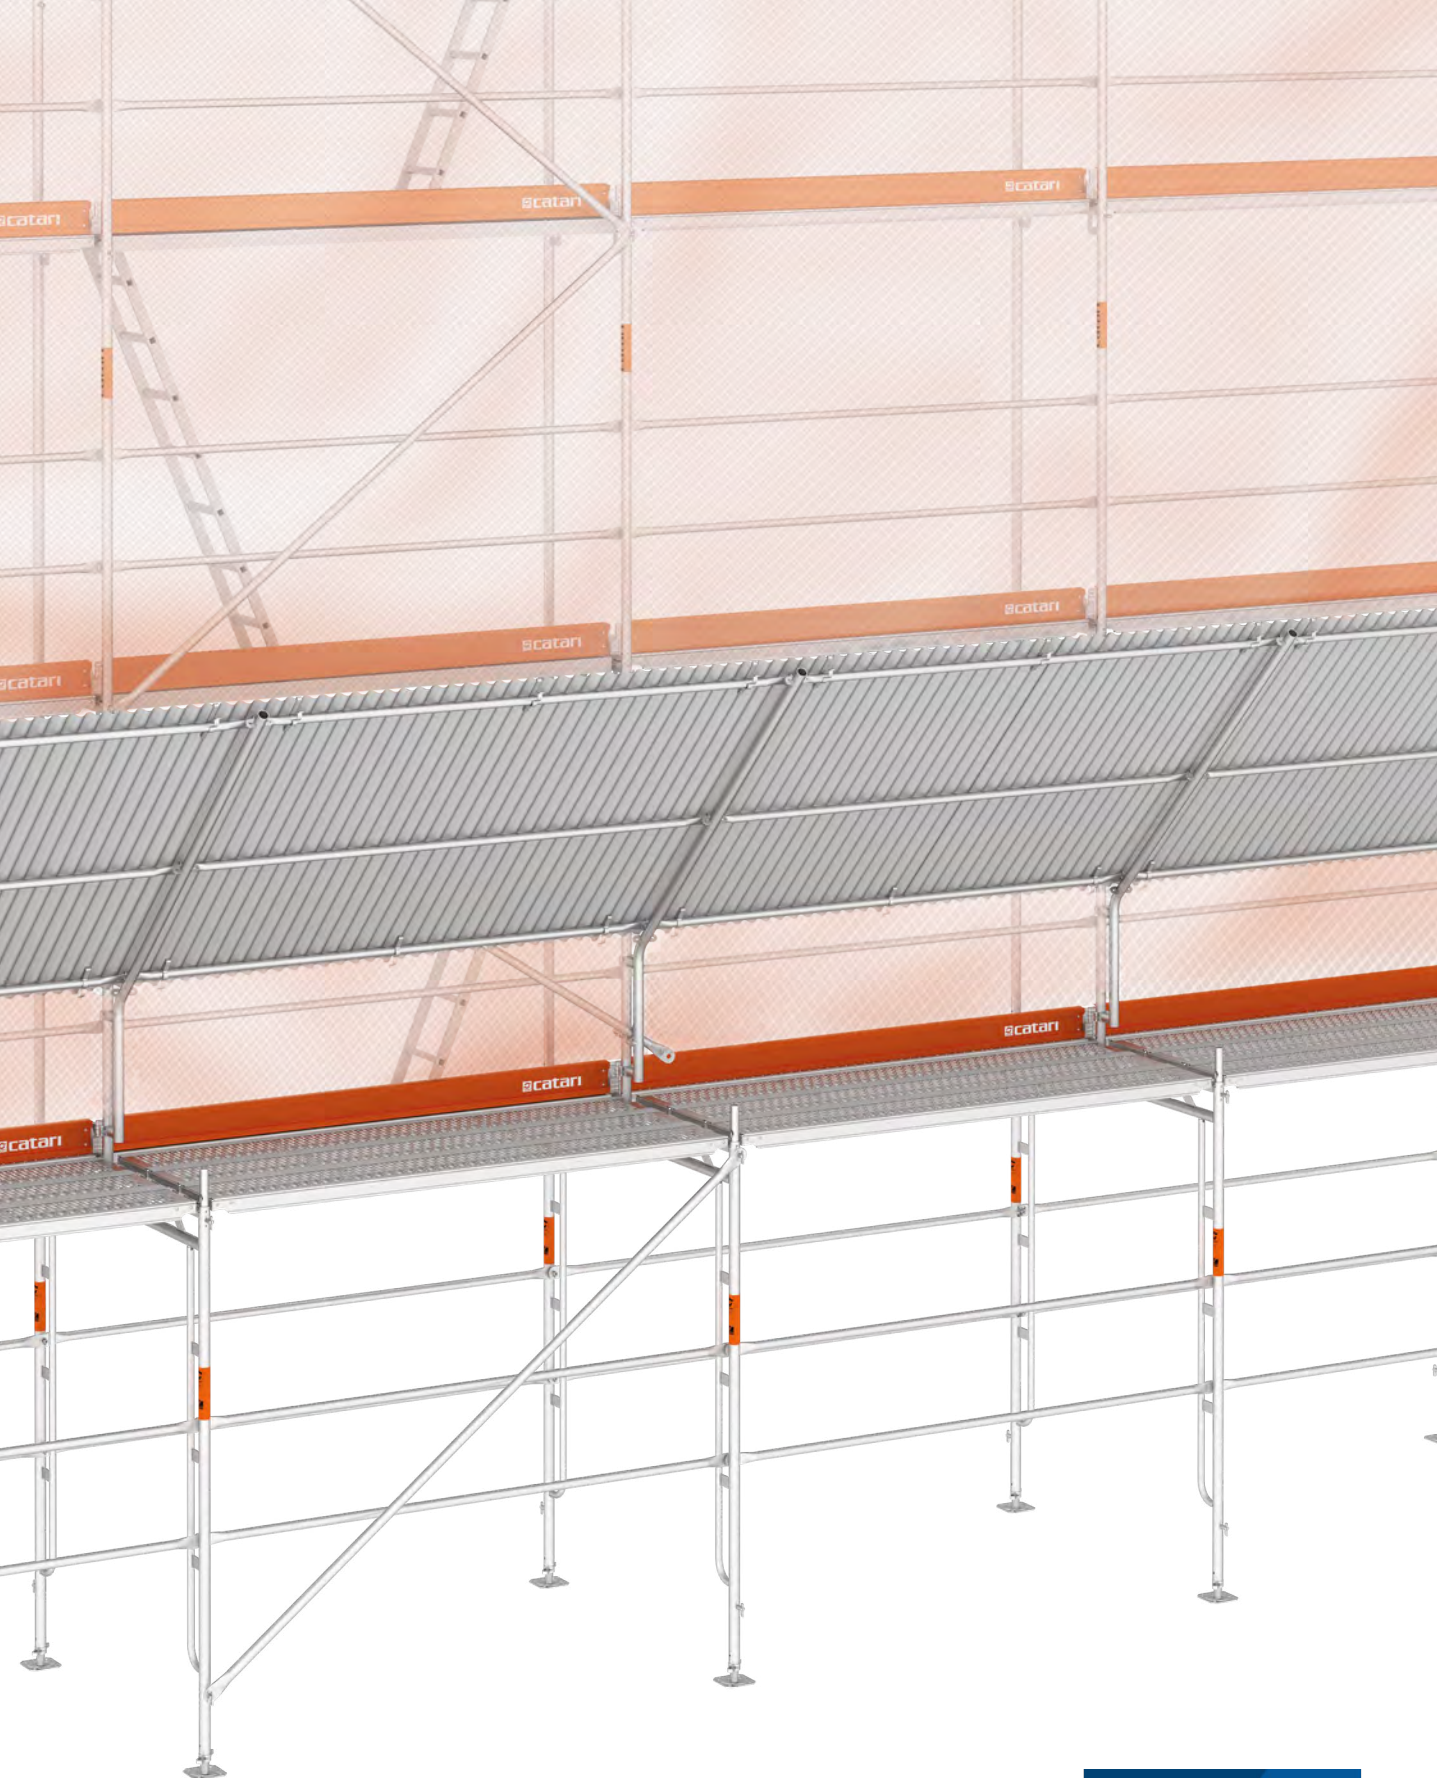




EN 12810-1

ASSEMBLY FRAMES


To overcome slopes or other constraints along the façade during the scaffold installation.

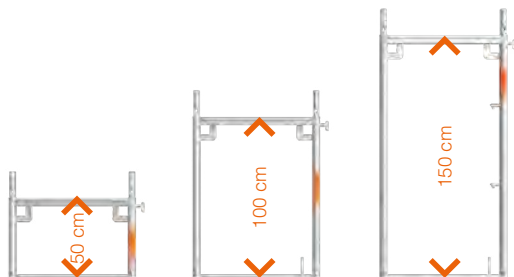

Ref.	Height (cm)	Width (cm)	Weight (kg)
FA.MD.730.500	50	73	8,30
FA.MD.730.1000	100		11,90
FA.MD.730.1500	150		15,40

ASSEMBLY FRAMES 42 CM

With a width inferior to the minimal working width, they are used to overcome protrusions or other constraints imposed by the façade.

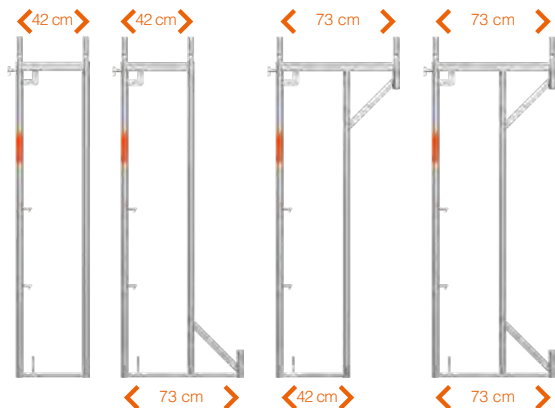

Ref.	Height (cm)	Width (cm)	Weight (kg)
FA.MD.420.2000	200	42	17,10
FA.MD.420.2000.SI		73 • 42	18,80
FA.MD.420.2000.SS		42 • 73	19,10
FA.MD.420.2000.S		73 • 73	20,80





LATTICE BEAMS

Used for suspended spans, mobile applications or working platforms. Fixed to the frames with double couplers.



Ref.	Material	Height (cm)	Length (cm)	Weight (kg)	
AA.VP.2000	Steel	40	200	20,70	
AA.VP.3000			300	28,30	
AA.VP.4000			400	40,10	
AA.VP.5000			500	49,20	
AA.VP.6000			600	59,60	
AA.VPA0400X1200	Aluminium		120	5,30	
AA.VPA0400X2200			220	9,20	
AA.VPA0400X3200			320	13,00	
AA.VPA0400X4200			420	16,60	
AA.VPA0400X5200			520	21,30	
AA.VPA0400X6200			620	25,50	



SPIGOT FOR JOINTING LATTICE BEAMS

To connect two lattice beams, aluminium or steel, when a longer length is needed.



Ref.	Weight (kg)
AA.VP.EC	1,50
AA.PARAM12X065D931 ☹	0,08
AA.PORCM12D985 ☹	0,05

☹ Screw M12x65 mm
Locknut M12

STEEL LATTICE BEAMS WITH 4 COUPLERS

Doubles the span between frames when constraints, such as garages, need to be overcome. Provided of fixing couplers at the extremities and a built-in spigot in the middle, to stack a frame.



Ref.	Height (cm)	Length (cm)	Weight (kg)
FA.VS4A4140	25	414	43,00
FA.VS4A5140		514	52,30
FA.VS4A6140		614	61,50



WALL TIES


Transmit the horizontal loads of the scaffold to the anchoring wall. Fixed to the frame with a double coupler.



Ref.	Length (cm)	Weight (kg)
AA.GA.250	25	1,10
AA.GA.300	30	1,30
AA.GA.500	50	2,10
AA.GA.1000	100	3,90
AA.GA.1500	150	5,80
AA.GA.2000	200	7,70
AA.GA.2500	250	9,50
AA.GA.3000	300	11,40

WALL LATTICE TIES

Fixed to a resistant wall, they suspend the scaffold in situations where it is not possible to support it on the ground.



Ref.	Height (cm)	Length (cm)	Weight (kg)
AA.CL.AM	45	135	22,70
AA.CLAM1650	60	165	29,20



EXTENDABLE STABILIZER

It serves to stabilize a scaffold up to 6 m height, when this isn't anchored to a façade.



Ref.

Fixing height (cm) **h**

Weight (kg)

AA.ETLC

240 • 400

31,40



DIAGONAL BRACES COUPLER/WEDGE HEAD

Used in pairs to stabilize non-tied scaffolds up to a 6m height, without drilling or using of screws.



Ref.

Distance (cm) **d**

Weight (kg)

US.HZ.AT.1200 ①

120

5,10

US.DG.AT.2100 ②

7,60

US.HZ.AT.2100 ①

210

7,60

US.DG.AT.2800 ②

280

9,50

US.HZ.AT.2800 ①

9,50

US.DG.AT.3600 ②

11,60





COUPLER WITH GUARDRAIL SOCKET

To add a supplementary guardrail. Used in pairs.



Ref.

Weight (kg)

AA.AF

0,76



COUPLER FOR FIXING THE TOE BOARD

To add a supplementary toe board or to place the adjustable toe board on the corners. Used in pairs.



Ref.

Weight (kg)

AA.AR

0,84



LEDGER WITH COUPLERS 0,73 M

Creates alternative levels and allows to overcome constraints on the working corridor. Used in pairs.



Ref.

Width (cm)

Weight (kg)

AA.CA.730 

73

3,50

 To be used with deck retainers **US.FS.0730**.



DECK RETAINER 0,73 M

To prevent decks of being involuntarily lifted, when using ledgers with couplers.



Ref.


Width (cm)

Weight (kg)

US.FS.0730

73

1,30

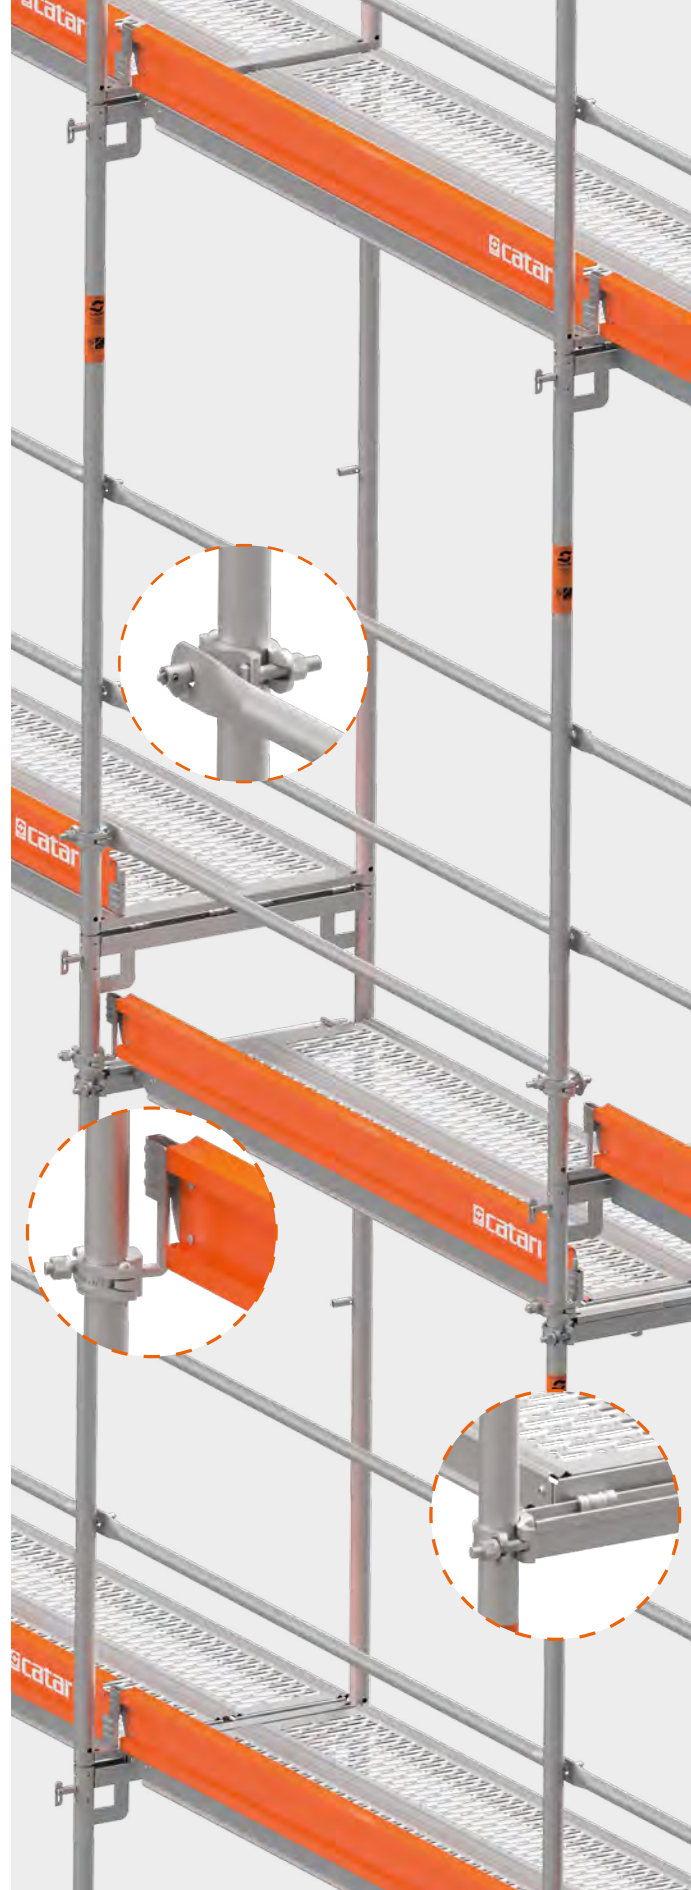



CASTOR WHEEL WITH LEVELER AND BRAKE

To be used on plane grounds only. Provided with a turning axis and a brake to enable direction changes.



Ref.	Height (cm)	Service load (kg)	Weight (kg)
AA.RNT.750	Up to 64 cm	Locked: 750 Unlocked: 400	5,80



SPACING COUPLER

To connect two frames, separated only by the base jacks distance, replacing the use of a tube and two double couplers.




Ref.	Length (cm)	Weight (kg)
AA.AE	16	1,70



ROSETTE COUPLER

To connect Catari US® ledgers or diagonal braces.



Ref.

Weight (kg)

AA.AROSE

1,20

BRIDGING LEDGERS

Used in spans larger than to 1.57 m, such as working platforms (birdcage scaffold).



Ref.

Width (cm)

Weight (kg)

US.VP.U.1570

157

9,90

US.VP.U.2070

207

13,40

US.VP.U.2570

257

16,90

US.VP.U.3070

307

20,40




AA.VP
Lattice beams
Page 37



TRANSPORT AND STORAGE

To pack and transport all components of Catari FA-48®. These multi-trip crates can be overlapped with crane or lift-truck and, when not needed, they can be disassembled.

MODULAR PALLETS

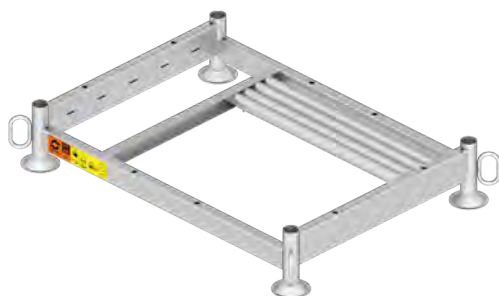

Ref.	Height (cm)	Length (cm)	Width (cm)	Weight (kg)
TA.PUB085X120	97	120	85	45,90
TA.PUB103X120			103	52,40

MODULAR CRATE PALLET



Ref.	Height (cm)	Length (cm)	Width (cm)	Weight (kg)
TA.PUR085X120	97	120	85	99,50





solutions holding **your ideas.**

www.reyfama.es

📞 971 76 47 50

📞 625 12 88 74



The images are for illustration purposes only and may not perfectly or accurately depict a realistic object or process. The illustrations are purposely designed to demonstrate a principle or sequence of steps so that the viewer has a better understanding. Details may be simplified or omitted, scale may be resized.



© Catari 2020
Art director: Stéphane Leite
All content on this catalogue, such as text, graphics, logos and images, is the property of Catari Industria, S.A. or its content suppliers and protected by copyright law of the European Union.